


## Main Specifications of Heating Pad

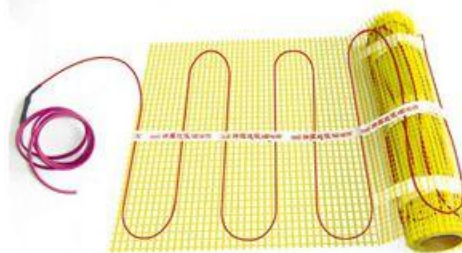

### 160W/M2 Twin Conductor

SH PCN	Rated power (W)	Resistance( $\Omega$ ) 20°C+10/-5%	Pad size (m)	Cable Length (m)
SHDN00075	160	302.5	0.5X2.0	11.1
SHDN00076	240	201.7	0.5X3.0	16.65
SHDN00077	320	151.3	0.5X4.0	22.2
SHDN00078	400	121.0	0.5X5.0	27.75
SHDN00079	480	100.8	0.5X6.0	33.3
SHDN00080	560	86.4	0.5X7.0	38.85
SHDN00081	640	75.6	0.5X8.0	44.4
SHDN00082	720	67.2	0.5X9.0	49.95
SHDN00083	800	60.5	0.5X10.0	55.5
SHDN00084	960	50.4	0.5X12.0	66.6
SHDN00085	1120	43.2	0.5X14.0	77.7
SHDN00086	1280	37.8	0.5X16.0	88.8
SHDN00087	1440	33.6	0.5X18.0	99.9
SHDN00088	1600	30.3	0.5X20.0	111
SHDN00099	1920	25.2	0.5X24.0	133.2

### 100W/M2 Twin Conductor

SH PCN	Rated power (W)	Resistance ( $\Omega$ ) 20°C+10/-5%	Pad size (m)	Cable Length (m)
SHDN00061	100	484.0	0.5X2.0	9.09
SHDN00062	150	322.7	0.5X3.0	13.635
SHDN00063	200	242.0	0.5X4.0	18.18
SHDN00064	250	193.6	0.5X5.0	22.725
SHDN00065	300	161.3	0.5X6.0	27.27
SHDN00066	350	138.3	0.5X7.0	31.815
SHDN00067	400	121.0	0.5X8.0	36.36
SHDN00068	450	107.6	0.5X9.0	40.905
SHDN00069	500	96.8	0.5X10.0	45.45
SHDN00070	600	80.7	0.5X12.0	54.54
SHDN00071	700	69.1	0.5X14.0	63.63
SHDN00072	800	60.5	0.5X16.0	72.72
SHDN00073	900	53.8	0.5X18.0	81.81
SHDN00074	1000	48.4	0.5X20.0	90.9
SHDN00098	1200	40.3	0.5X24.0	109.08